
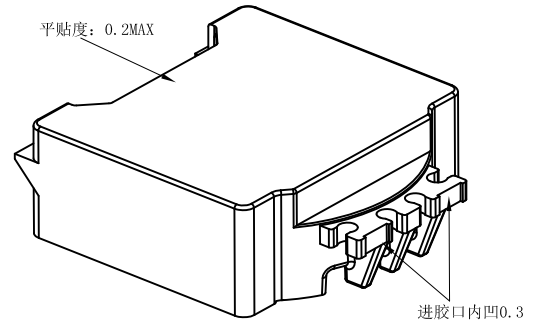


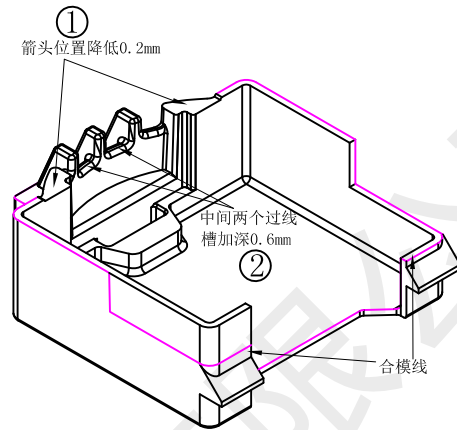


型号

ATQ-2712-1

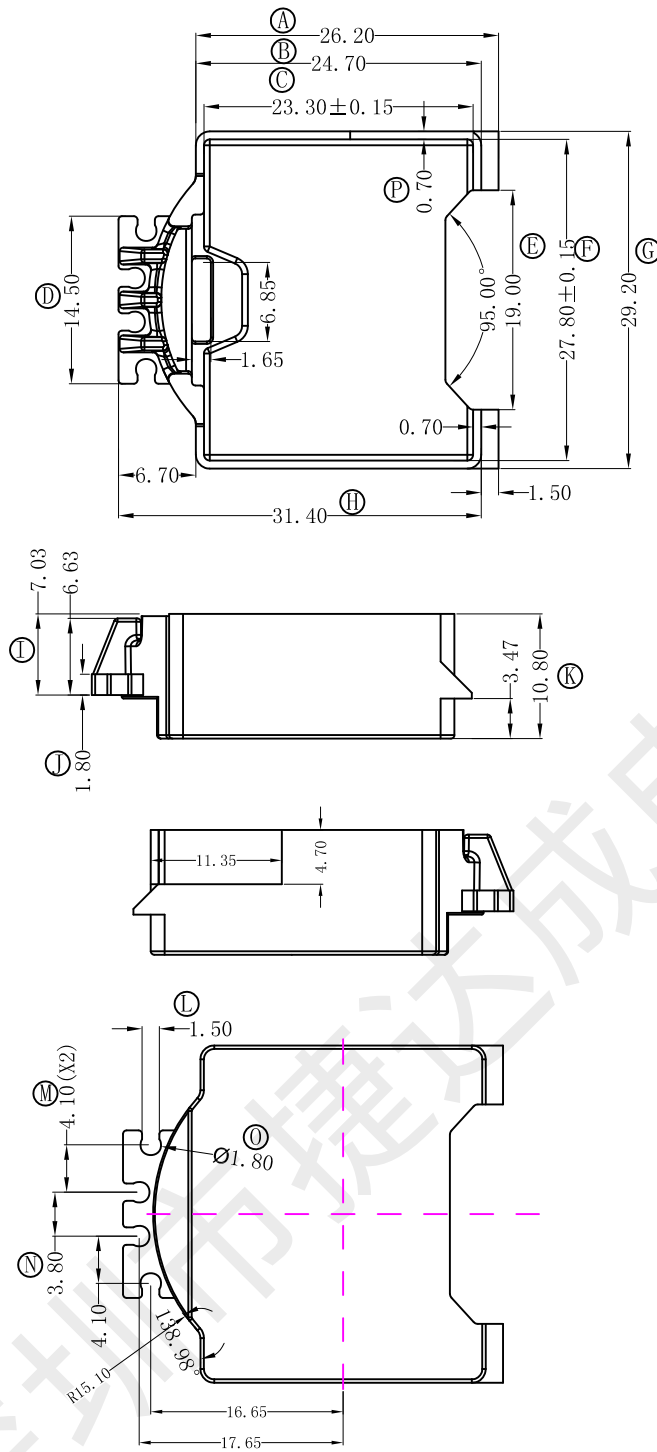

备注: 样品模


1. 耐压: 4.0KV/1.5mA 60S
2. 焊锡温度: 450° ±10° 3SEC
3. 任意点强度: 1.5KG Min
4. 与ATQ-2712匹配OK

| REV | DATE     | REVISIONS REC        |
|-----|----------|----------------------|
| 1   | 23-11-27 | 右上图中1.2两点修改, 版本升为1.1 |
|     |          |                      |
|     |          |                      |
|     |          |                      |

深圳市捷达成电子有限公司

SHANZHEN JIEDACHENG ELECTRONICS CO.,LTD.

TEL:0755-27317730 FAX:0755-27317731

ANGLE:  
+/-1°UNIT:  
MMSCALE:  
4/1

MODEL NAME:

ATQ-2712-1 COVER

UL REC:  
UL 94V-0

PIN TENSION LOAD:

DATE:  
2023-11-27BOBBIN MATERIAL:  
PM-9630

PIN MATERIAL:

DRAWING NO:  
ATQ-27-COVERREV:  
1.1

DRAFTER

L.R.J

TOLERANCE

0&lt;L&lt;4 ±0.1

4&lt;L&lt;16 ±0.2

16&lt;L&lt;50 ±0.3

PIN PITCH ±0.2

CHECKER

Y.F.